


13. Outline Drawing

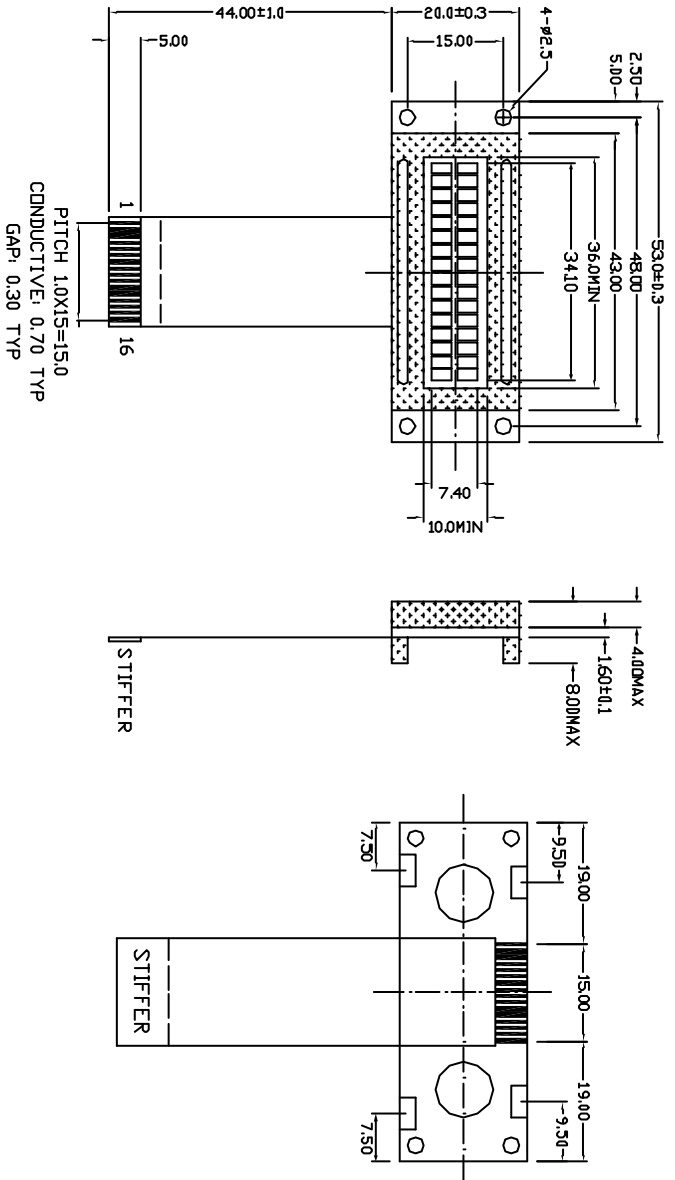

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

1. LCD TYPE: STN , YELLOW-GREEN
2. VIEWING ANGLE: 6:00 CLOCK
3. POLARIZER: TRANSPARENT/POSITIVE
4. OPERATING TEMP: -20°C-70°C
5. STORAGE TEMP: -30°C-80°C
6. POWER SUPPLY: +5V, VLCD:4.5V
7. BACKLIGHT:YELLOW-GREEN LED, +5V
8. LCD DRIVE MODE: 1/16 DUTY, 1/5 BIAS
9. LCD DRIVER: KS0066 & KS0065
10. UNMARKED TOLERANCE: ±0.2mm

