NO.	REVISED BY	CONTENTS

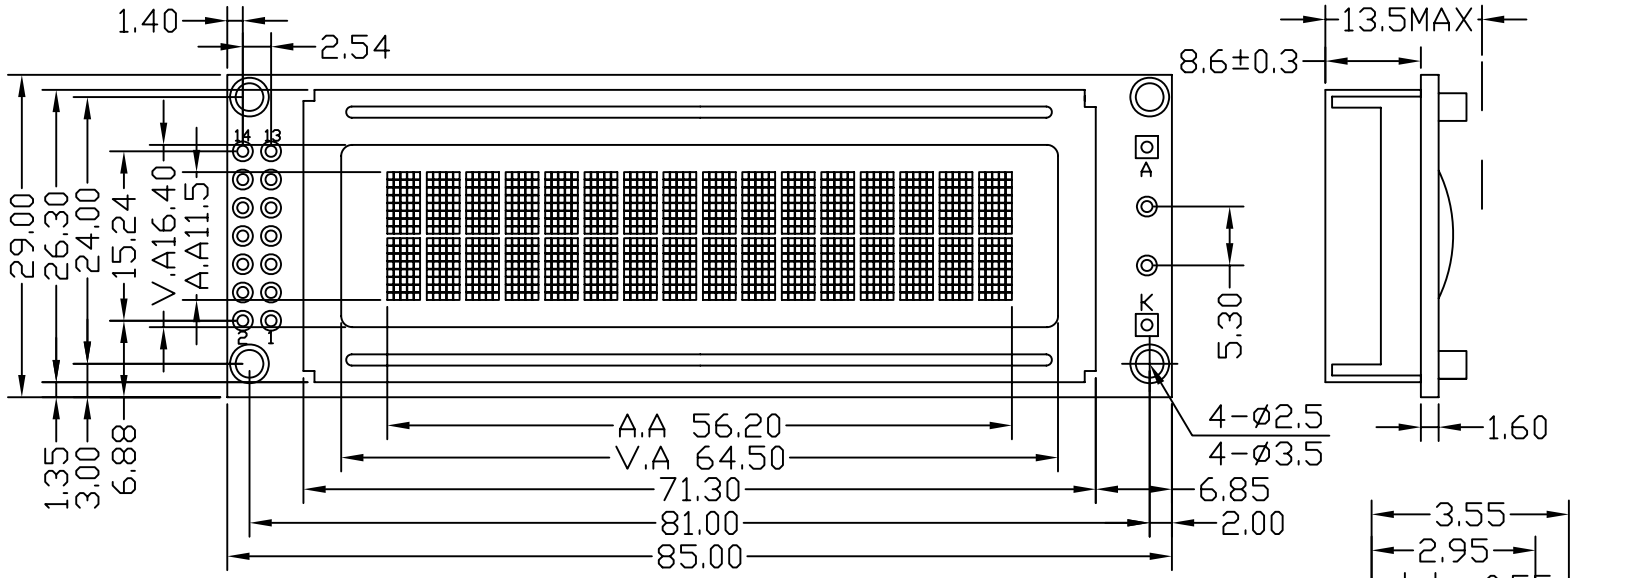

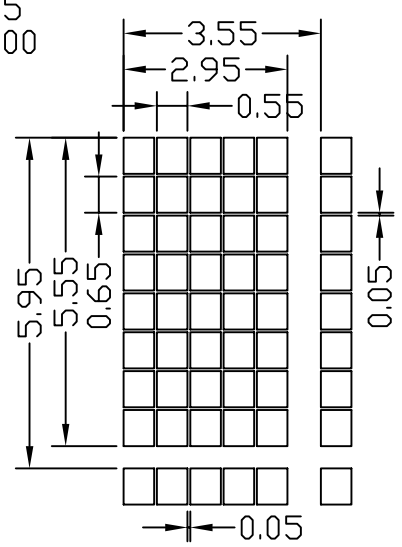

1	2	3	4	5	6	7	8	9	10	11	12	13	14
VDD	VSS	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

NOTES:

1. LCD TYPE: STN , BLUE
2. VIEWING ANGLE: 6:00 CLOCK
3. POLARIZER: TRANSMISSIVE / NEGATIVE
4. OPERATING TEMP: -20°C-70°C
5. STORAGE TEMP: -30°C-80°C
6. POWER SUPPLY: +5V,VLCD:4.3V
7. BACKLIGHT:WHITE LED, +5V
8. LCD DRIVE MODE: 1/16 DUTY, 1/5 BIAS
9. LCD DRIVER: S6A0069 & S6A0065
10. UNMARKED TOLERANCE: ±0.2mm

SHENZHEN LONDA TECH CO.,LTD
4/F, WEST BLOCK, NO. 2 BUILDING, BaGua 2nd Road, ShenZhen, China

VERSION	DRAWN BY: Even	TITLE: LMC16214A	
DATE	APPROVED BY:	UNMARKED TOLERANCE: ±0.2	UNIT: mm

EMAIL:SALES@LONDATECH.COM
WEBSITE:WWW.LONDATECH.COM
TEL:86-755-82429036 82420578 FAX:86-755-82448691