


# 13. Outline Drawing

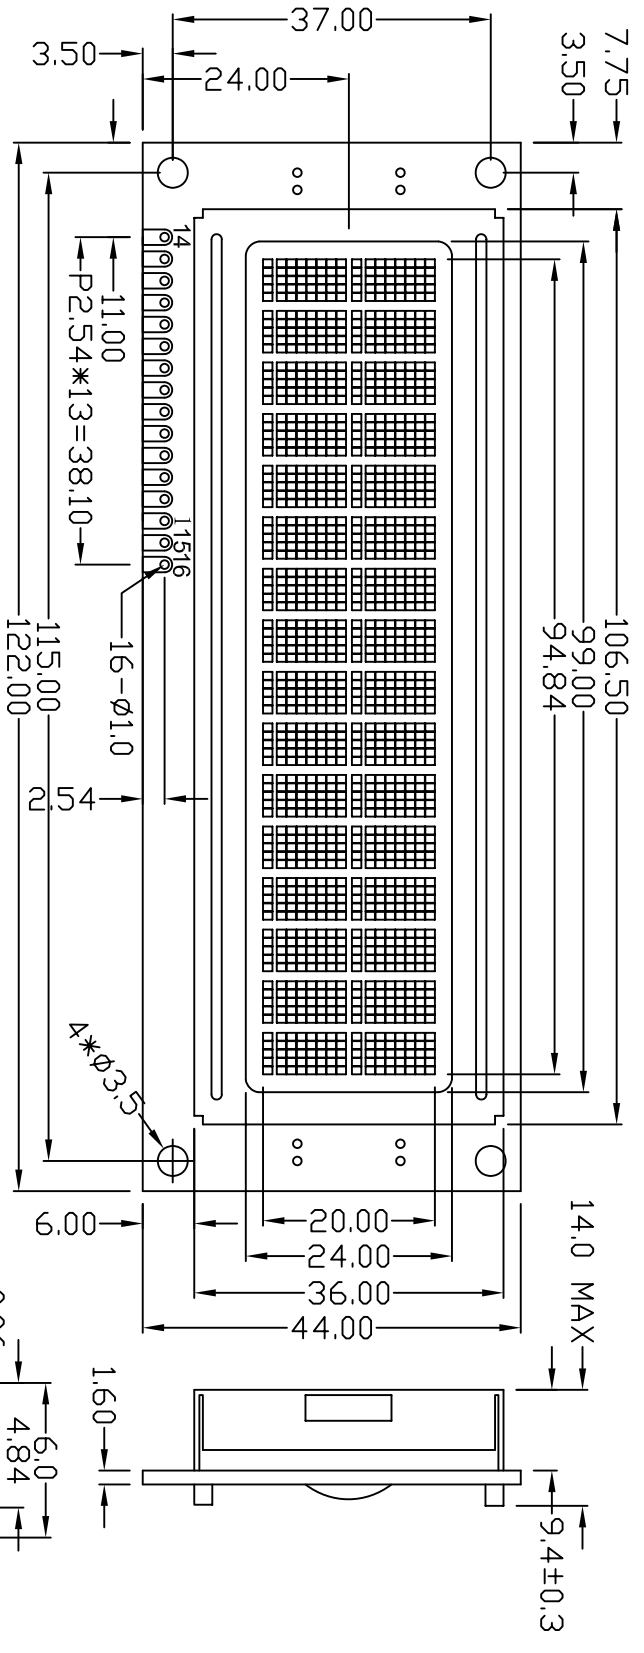

The Tolerance unless classified ± 0.2mm

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

**NOTES:**

1. LCD TYPE: STN, YELLOW-GREEN MODE
2. VIEWING ANGLE: 6:00 CLOCK
3. POLARIZER: REFLECTIVE / POSITIVE
4. OPERATING TEMP: 0° C - 50° C
5. STORAGE TEMP: -10° C - 60° C
6. POWER SUPPLY: +5V, VLCD:4.3V
7. LCD DRIVE MODE: 1/16 DUTY, 1/4 BIAS
8. LCD DRIVER: S6A0069 & S6A0065

