
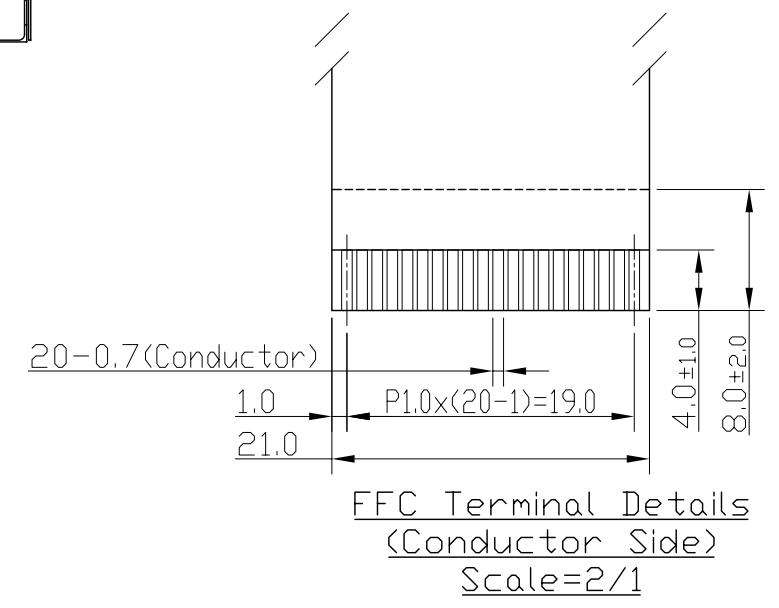


Terminal	
No.	Pin Name
1	VDUT
2	V0
3	VDD
4	VSS
5	/WAIT
6	NC
7	/CS
8	A0
9	/WR(R/W)
10	/RD(E)
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	/RST
20	BLA

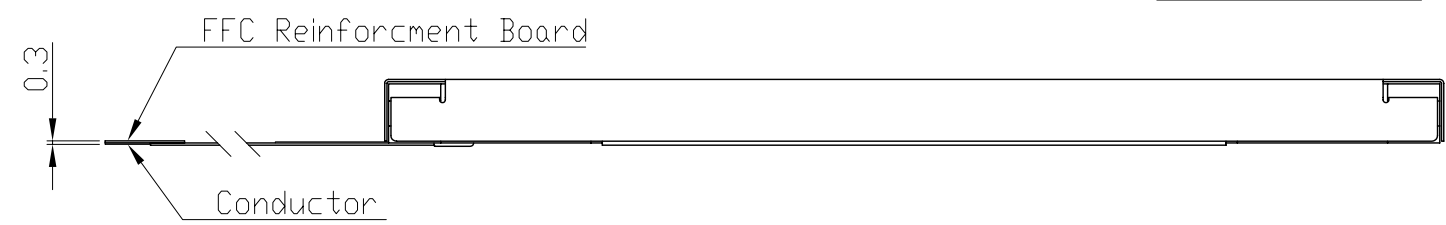

- Note:
- *1. LCD Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/128
 - *4. Operating Voltage : 5.0V
 - *5. Backlight Color : White
 - *6. Backlight Supply : 85mA(5.0V TYP.)
 - *7. Built in LCD Controller : S1D13700 or equivalent
 - *8. Operating Temperature : -20°C ~ 70°C
 - *9. Storage Temperature : -30°C ~ 80°C
 - *10. An external VR(25k~50k) must be connected for Contrast Control

C		
B		
A	-Add Metal Frame	Lin Yan 2007-01-11
Rev	Note	Date
Dwg Title LM1095E Outline Dwg		
Dwg No.	MK-001493a-1-1	Date 2006-11-15
Scale	Tol.	Unit
3/2	±0.5	mm
Approved	Checked	Paper Size A3
		Drawn Kenny Yuen

TOPWAY