


Terminal No.	Pin Name
1	VSS
2	VDD
3	V0
4	R/S
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS1
16	/RST
17	/CS2
18	/CS3
19	VOUT
20	BLA

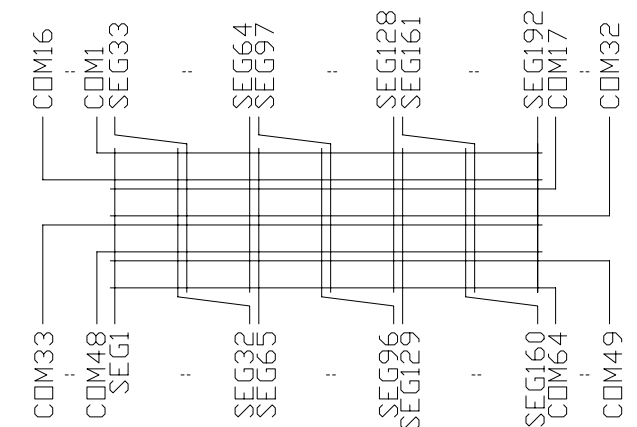

Wiring Details
Scale=free

- Note:
- *1. Display Type : STN-YG, Positive, Transflective
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/64, Bias : 1/9
 - *4. Backlight Color : Y/G
 - *5. Operating Voltage : 5.0V
 - *6. Operating Temperature : -20°C~70°C
 - *7. Storage Temperature : -30°C~80°C
 - *8. An external VR(25K to 50K) must be connected for Contrast Control
 - *9. Environmental Safe Standard : RoHS

C		
B		
A		
Rev	Note	Date
Dwg	Title	
LM19264KBC Outline Dwg		
Dwg No.	MK-001134-1-1	Date
		2005-12-29
Scale	Tol.	Unit
3/2	±0.5	mm
Paper Size	A3	
Approved	Checked	Drawn
		Li Shuai

TOPWAY