




Terminal(K1)	
No.	Pin Name
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS1
20	VOUT
21	BLA
22	BLK

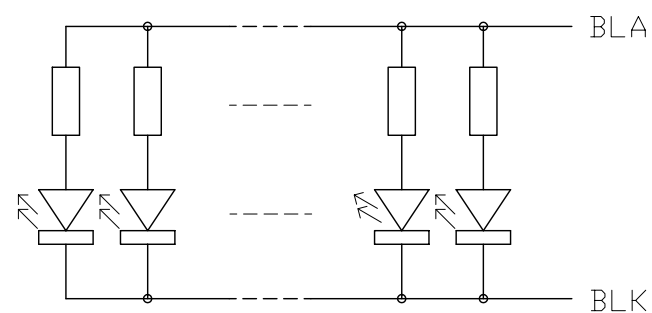

Backlight Circuit Details  
(No. of LED = 10pcs)  
Scale=free

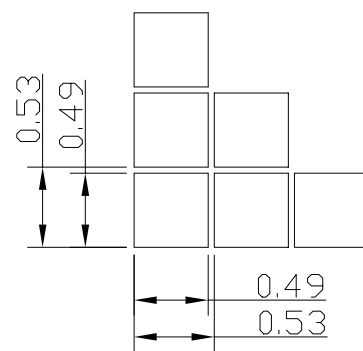

Pixels Details  
Scale=20/1

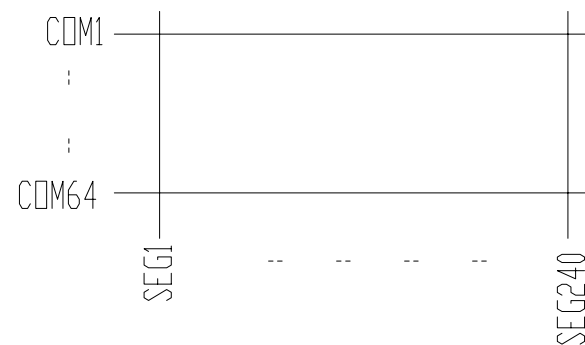

Wiring Details  
Scale=free

Note:

- \*1. Display Type : STN, Negative, Transflective
- \*2. Viewing Direction : 6H
- \*3. Duty : 1/64, Bias : 1/9
- \*4. Operating Voltage : 5.0V
- \*5. Backlight Color : White
- \*6. Operating Temperature : -20°C~70°C
- \*7. Storage Temperature : -30°C~80°C
- \*8. An external VR(25K to 50K) must be connected for Contrast Control
- \*9. Environmental Safe Standard : RoHS

C		
B		
A	-ADD Note -Revise Dimension	Li Shuai 2006-03-16
Rev/Note		Date
Dwg Title	LM24064DFC Outline Dwg	
Dwg No.	MK-000608a-1-1	Date 2004-09-01
Scale	Tol. ±0.5	Unit mm Paper Size A3
Approved	Checked	Drawn Li Shuai

**TOPWAY**