



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Vss	Vdd	V0	A0	CS1	CS2	CL	RD<E>	WR<R/W>	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	RES	A	K

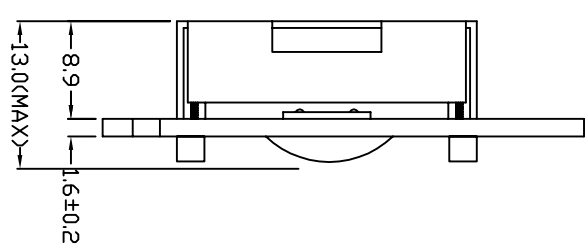

- NOTES:
- 1.DISPLAY TYPE: STN/Y-G MODE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSPARENT/POSITIVE
 - 4.OPERATING TEMP: 0°C---+50°C
 - 5.STORAGE TEMP: -20°C---+60°C
 - 6.ALL UNMARKED TOLERANCES: ±0.3mm
 - 7.DRIVE METHOD: DUTY=1/32 BIAS=1/6
 - 8.LCD OPERATING VOLTAGE: 6.0V
 - 9.BACKLIGHT TYPE: LED(4.2V 45.0mA MAX)
 - 10.CONTROLLER AND DRIVER: NJU6452AC
 - 11.BEZEL IS TO BE PAINTED BLACK

REVISION	BY	DATE	SCALE	UNIT	DESCRIPTION
1					
2					
3					
4					



SHENZHEN LONDA TECH CO.,LTD
 4/F, WEST BLOCK, NO. 2 BUILDING, Baofu 2nd Road, Shenzhen, China

DRAWN BY:	BY:	TITLE:	DWG NO:	SHEET NO:
CHECKED BY:	BY:	LMG122321A		1 OF 1
APPROVED BY:	BY:			