




### 13. OUTLINE DIMENSION

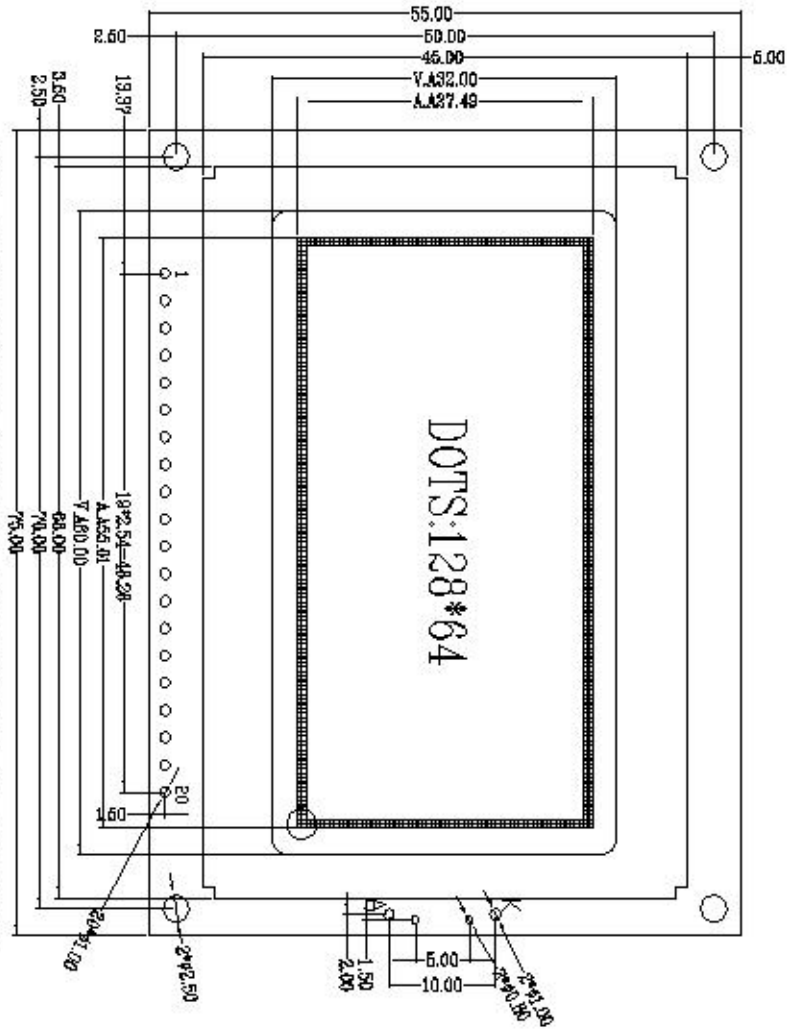

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDD	VSS	V0	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	CS2/CS1	RST	R/W	RS	E	VEE	K	A	

**NOTES:**

- 1.LCD TYPE: STN / BLUE
- 2.VIEWING ANGLE: 6:00 CLOCK
- 3.POLARIZER MODE: TRANSMISSIVE / NEGATIVE
- 4.OPERATING TEMP: -20°C---+70°C
- 5.STORAGE TEMP: -30°C---+80°C
- 6.POWER SUPPLY: +5V/VLCD: 9V
- 7.BACKLIGHT:WHITE LED, 5.0V
- 8.LCD DRIVE MODE: 1/64 DUTY,1/9 BIAS
- 9.LCD DRIVER, S6B0107 & S6B0108
- 10.UNMARKED TOLERANCE: ±0.2mm

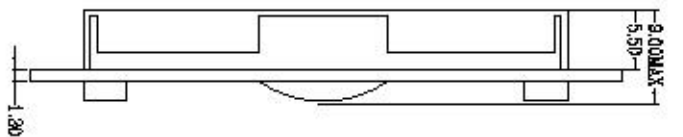

MODEL LMG1286410A-BMDSWW-NY

25/25

PRODUCT SPECIFICATIONS

REV:A