


PIN NO.	DESCRIPTION
1	GND
2	VDD
3	VDD
4	CS
5	RS
6	VR
7	RD
8	RESET
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	GND
26	X-
27	Y+
28	X+
29	Y-
30	LED_1
31	LED_2
32	LED_3
33	LED_4
34	LED_5
35	LED_A
36	LED_A
37	GND

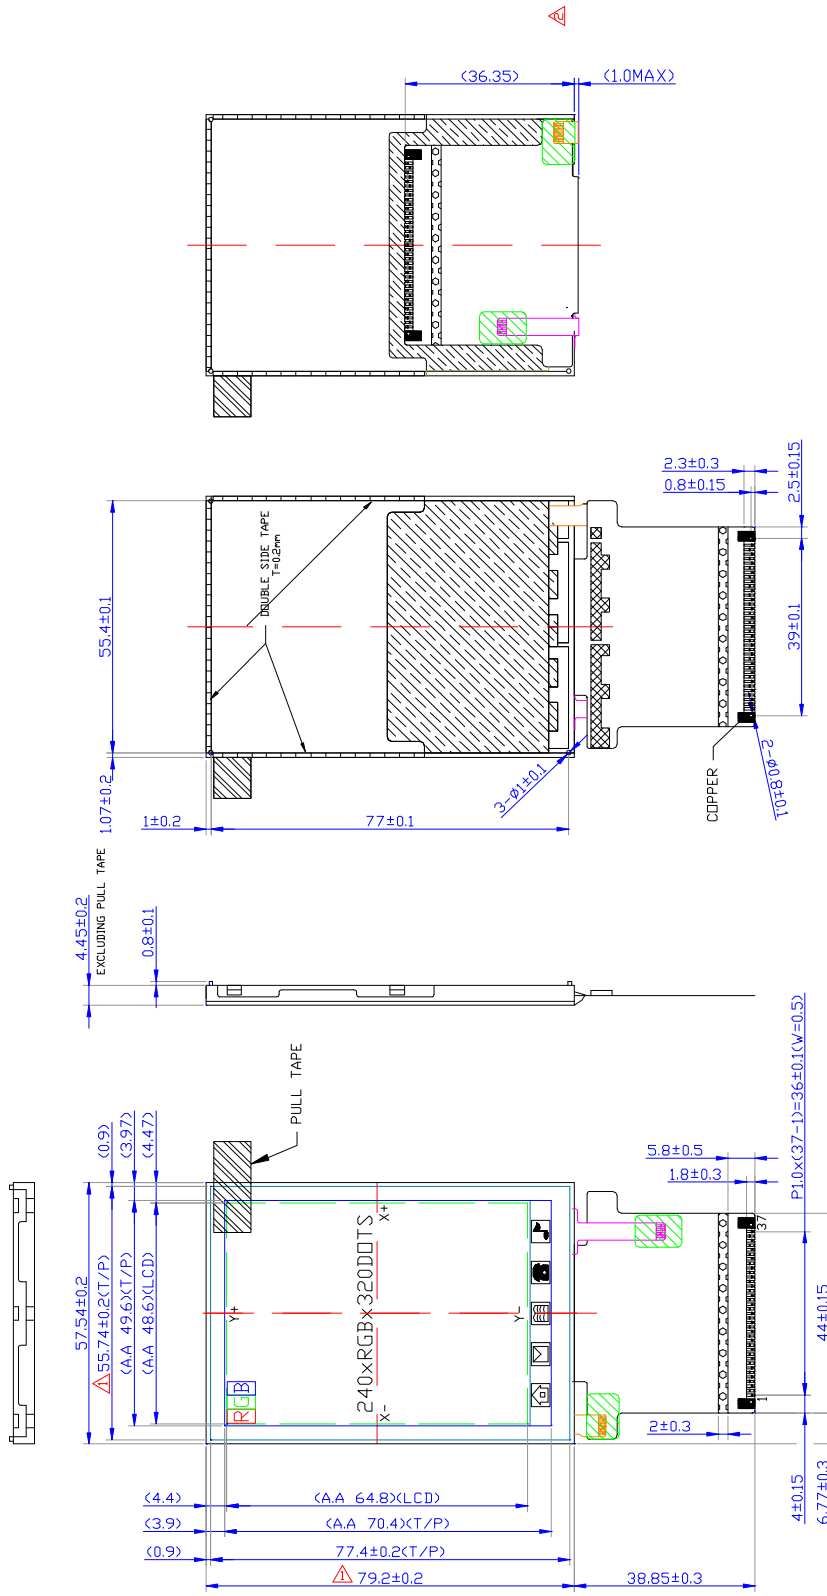

COMPONENT AREA T<1mm
DOUBLE SIDE TAPE T=0.05mm

- NOTES:
1. DISPLAY TYPE 3.2" TFT
 2. VIEWING DIRECTION 12H
 3. POLARIZER MODE TRANSMISSIVE
 4. BACKLIGHT TYPE WHITE (5-LED PARALLEL)
 5. DRIVER IC HX8347
 6. OPERATING TEMP. -20°C ~ 70°C
 7. STORAGE TEMP. -30°C ~ 80°C

2	REV.	NEW DRAWING	CONTENT	DATE
1	DRAWN	M	DATE	2008-07-04
	CHECKED	V	DATE	2011-01-26
	APPROVED	C	DATE	2011-01-26

ILLUMINANT

DRAWING NO. I3202-7HMT2432A
UNIT:mm PAGE: 1/1 VER: A SCALE: 1/1