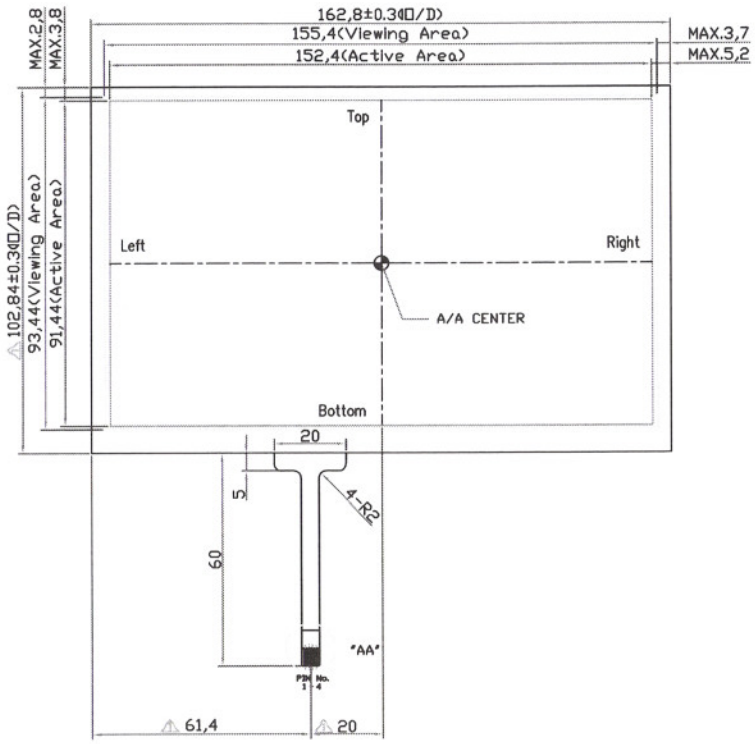

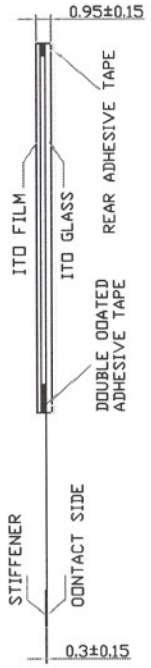

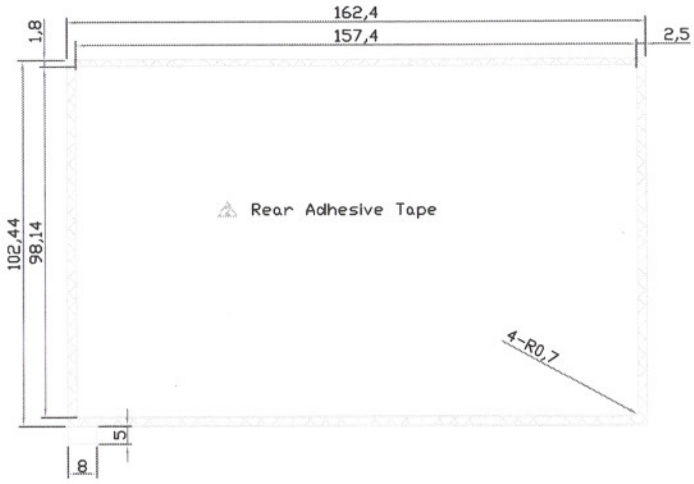

REMARK

RoHS Compliant

1. Glass Thk: 0.7mm
2. Film Type: Non-Glare
3. Total Thk: 0.95±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance
   100 < Y < 1200 ohm
   100 < X < 1200 ohm
7. Connector: FPC
8. General Tolerance: ±0.5

CIRCUIT DIAGRAM

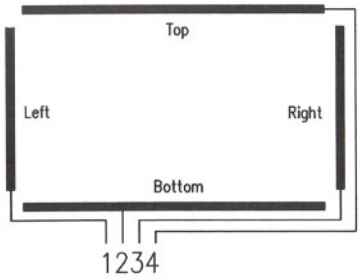

SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"

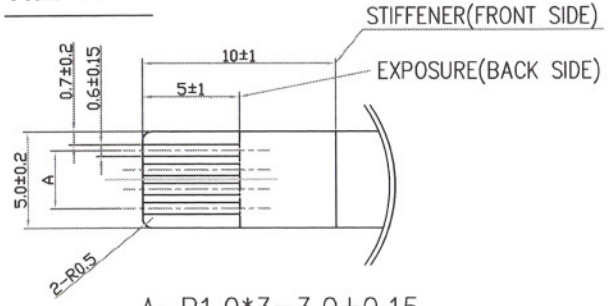

A=P1.0*3=3.0±0.15

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW
2	Add a Rear DAT	06.10.18	H.Y.IM	K.B.KIM	T.S.KANG	APPROVE
1	FPC Location, Dimension Change	06.08.30	H.Y.IM	K.B.KIM	T.S.KANG	CHECK
0	NEW DRAW	06.08.10	H.Y.IM	K.B.KIM	T.S.KANG	DESIGN

STD.TOL	UNIT	mm
	SCALE	NONE

DRAWING NO. TP070W-1 REV. 2

DESCRIPTION 7.0" TOUCH PANEL SHEET 1/1

Web-Site @ www.hantouchusa.com