


REMARK

1. Glass Thk: 0.7mm
2. Film Type: Non-Glare
3. Total Thk:  $0.95 \pm 0.15$ mm
4. Linearity:  $\pm 1.8\%$  or less
5. Transmittance: 80% or more
6. Resistance  
 $100 < Y < 1200$  ohm  
 $100 < X < 1200$  ohm
7. Connector: FPC
8. General Tolerance:  $\pm 0.5$





CIRCUIT DIAGRAM

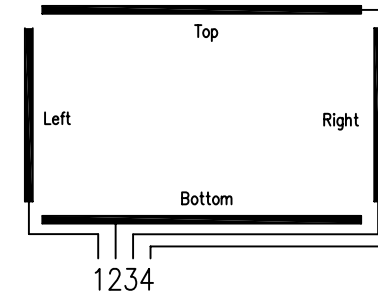

SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

Detail "AA"

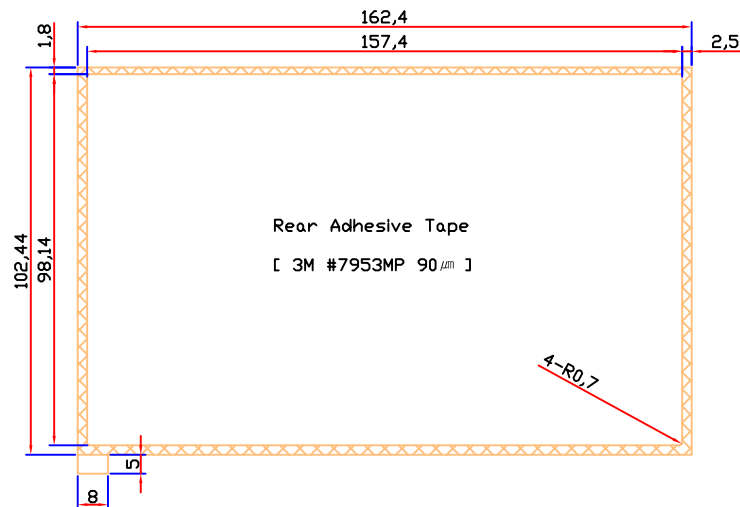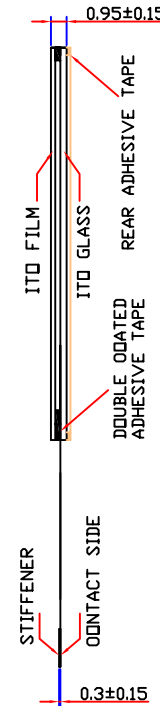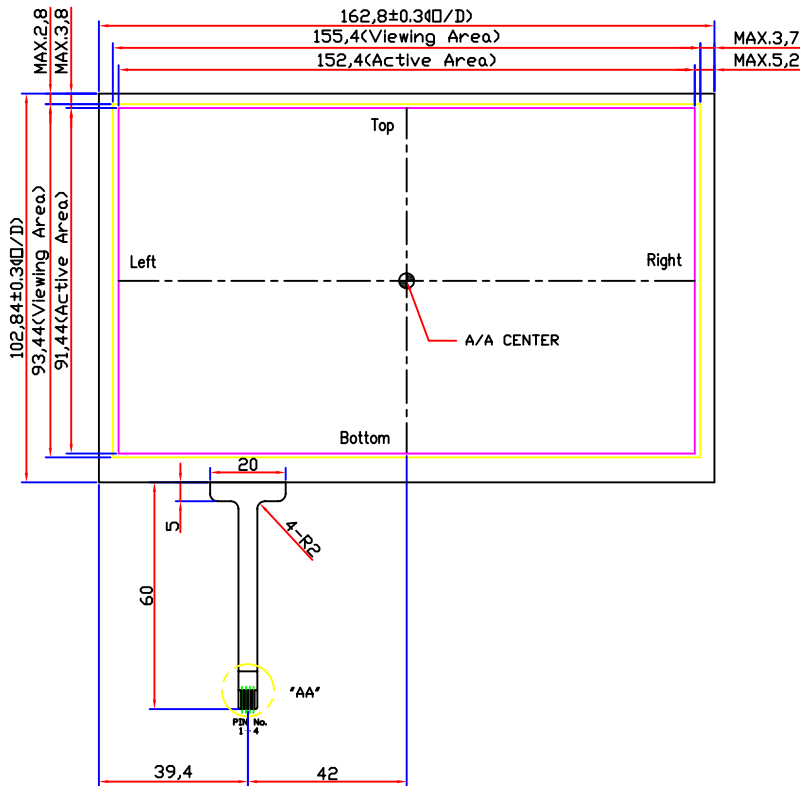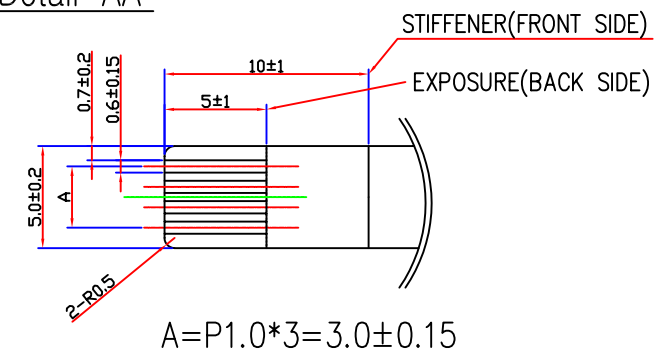

**NOTE:** The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: [www.hantouchUSA.com](http://www.hantouchUSA.com), under Incoming Inspection Standards.

APPROVE		STD.TOL	UNIT	mm	DRAWING NO.	REV.
CHECK			SCALE	NONE	HW070A-NCOFD62-R	
DESIGN					DESCRIPTION	SHEET
REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW
0	NEW DRAW	06.11.24	H.Y. IM	K.B. KIM	M.K. CHO	
					7.0" TOUCH PANEL	1/1